(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(72) Inventors: SCHILOWITZ, Alan, M.; 15 North 6th Avenue, highland Park, NJ 08904 (US). LIRA-CANTU, Monica, M.; Oso Mayor, 43, Urb Cam Margaritt III, E-08757 Barcelona (ES). SONG, Limin; 42 Zaitz Farm Road, Princeton Junction, NJ 08550 (US). VANN, Walter, D.; 80 Carlton Avenue, Marlton, NJ 08053 (US).

(54) Title: METHOD FOR ANALYSING A WORKING FLUID USING IMPEDANCE SPECTROSCOPY

Used Paper Machine Oil
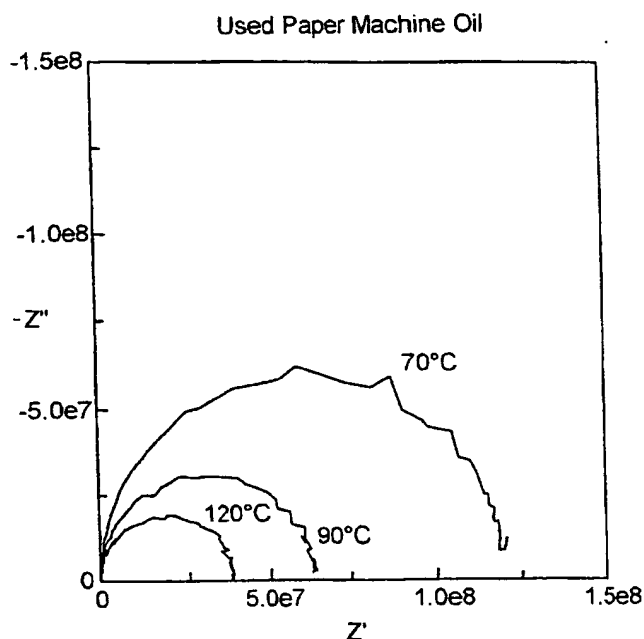
(57) Abstract: An on-line method for determining the condition of low conductivity working fluids using alternating current, electro-impedance spectroscopy is provided by making measurements over a range of frequencies at temperatures at or above 50 °C.

- 1 -

METHOD FOR ANALYSING A WORKING FLUID USING IMPEDANCE SPECTROSCOPY

FIELD OF INVENTION

[0001]   The present invention is broadly concerned with improvements in analyzing the electrical properties of a working fluid, such as a lubricating oil. More particularly the invention is concerned with an on-line, real time, electrical measure of lubricating oil degradation.

BACKGROUND OF INVENTION

[0002]   Working fluids, such as lubricating oils and hydraulic fluids, are important components of a wide variety of mechanical systems in which they provide one or more functions such as lubricating moving parts, transferring force or energy on the mechanical system, protecting parts against wear or even a combination of these.

[0003]   These fluids typically consist of a hydrocarbon, base oil formulated with numerous additives selected to enhance one or more performance characteristics of the fluid.

[0004]   With use over time these fluids may become contaminated with substances with which they come into contact, by the ingress of foreign substances in the mechanical system, by oxidation of the base oil and chemical decomposition of the additives used in the formulated fluids. The net result is a decrease in the performance characteristics of the fluid with the concomitant negative impact on the mechanical system using the fluid.

[0005]   Therefore, in many industrial environments regular fluid analysis by common laboratory methods is a standard *modus operandi*. This necessitates

running a sample of the fluid and transporting it, typically off-site, for analysis. This procedure normally takes at least three full days before the requisite analysis is completed and a report can be obtained. Such a time lag is highly undesirable.

[0006] The art is replete with proposed methods for the on-line evaluation of the quality of lubricants, many of which are based on electrical measurements, such as the dielectric constant or impedance of the fluid, with the measurements being taken most often at one, and sometimes two, discrete and fixed frequencies. Experience has shown, however, that these methods are not entirely satisfactory. For example, at some frequencies and at low temperatures the electrical property of the fluid being measured is insufficiently sensitive to give a reliable indication of the condition of the fluid and even if sufficiently sensitive, the frequency chosen may not necessarily provide an accurate indication of the condition of the lubricant. Also, the wires and other components used for making electrical measurements can produce spurious effects that obscure or distort the electrical properties of the fluid. Moreover, the best frequency for optimum sensitivity is highly dependent on the properties of the working fluid and measurements typically taken at discrete and fixed frequencies are not optimized for a specific working fluid.

[0007] Additionally, many working fluids have extremely low conductivities. For example, industrial oils typically have significantly lower conductivities than internal combustion engine lubricants undoubtedly due to the higher viscosity and lower additive concentrations of the industrial lubricants. Consequently the ability to employ electrical measurements based on fixed frequency measure-ments developed for engine lubricants to determine the quality or condition of oils that have relatively low conductivities such as industrial oils is quite problematic.

[0008]   Thus there remains a need for improvements in determining the condition of a working fluid such as a lubricant.

[0009]   An object, therefore, of the present invention is to provide a method for detecting the depletion of performance additives in a lubricant.

[0010]   Another object is to provide an electrical measurement method for determining the condition of low conductivity industrial oil.

[0011]   Still another object is to provide for improving the sensitivity in the electrical measurement for determining the condition of working fluids.

[0012]   These and other objects will become apparent from the description which follows.

SUMMARY OF INVENTION

[0013]   Briefly stated, the present invention employs alternating current (AC) electro-impedance spectroscopy to determine for working fluids such as lubricants, and especially industrial oils, one or more of the following properties: the resistance, the capacitance, the frequency at which the phase angle between the voltage and current is 45 degrees (Omega max), the time constant, and discrete impedance values; and comparing the determined property with a predetermined value for the same property for a known fluid condition to determine the condition of the working fluid. Preferably the property determined is measured at a temperature above about 50°C.

BRIEF DESCRIPTION OF DRAWINGS

[0014]   Figure 1 is a schematic illustration of a measuring device for collecting impedance data according to the invention.

- 4 -

[0015]   Figure 2 is a schematic illustration of a system for monitoring the condition of a working fluid according to the invention.

[0016]   Figures 3 and 4 demonstrate the ability to generate Nyquist curves for low conductivity oils at temperatures above 50°C.

DETAILED DESCRIPTION OF INVENTION

[0017]   AC (alternating current) electro-impedance spectroscopy is a well known technique. It involves the imposition of AC signals over a broad range of frequencies to a material to be analyzed. The electrical response to those signals is determined and by the application of electrical circuit theory a description of the properties of the material is obtained.

[0018]   The present invention employs AC electro-impedance spectroscopy to determine the conditions of a working fluid. Indeed the present invention is particularly applicable to determining the conditions of low conductivity oils. The low conductivity oils to which the present invention is particularly applicable are those unused oils that have a kinematic viscosity at 100°C of greater than 15 cSt and containing less than about 3 wt% (active basis) of additives selected from dispersants, antioxidants, detergents, VI improvers and antiwear agents. Thus, an important aspect of the present invention is the provision of an AC electro-impedance spectroscopic method for determining the condition of industrial oils, especially on-line, i.e., when contained in mechanical systems, even when the systems are operating.

[0019]   According to the invention, a pair of spaced apart electrodes, such as the concentric, cylindrical electrodes 1 and 2 shown in Figure 1, are placed in a body of working fluid to be analyzed. Preferably the working fluid is within a mechanical system, for example in an oil reservoir or sump of a mechanical system (not shown), in an oil delivery manifold, or bypass manifold of a

mechanical system (also not shown) requiring lubrication or use of a working fluid.

[0020] The dimensions of the electrode, of course, will depend on its positioning with the mechanical system and the nature of the working fluid being analyzed. For industrial lubricants, such as paper machine oils, the length of the electrodes shown in Figure 1 typically will be in the range of between about 0.5 cm to about 20 cm, the diameter of the outer electrode between about 0.5 cm to about 4 cm and the gap between the inner and outer electrode between about 0.1 to 10 mm. Other geometries for the electrodes may be employed, such as flat parallel plates, flat interdigitated electrodes etched on an inert substrate and the like.

[0021] Placing the electrodes in a working fluid contained in a mechanical system permits on-line, real time, analysis of the fluid, i.e., the condition of the fluid can be measured continuously while employed in the mechanical system without the need to remove a sample of the fluid from the system for analysis.

[0022] An AC signal is applied to one electrode at a plurality of frequencies, typically at more than three frequencies, for example from 4 to 1000 frequencies and preferably from 4 to 20 in the range of from 1 Hz to 3M Hz. The applied signal produces an electrical output at the other electrode which is measured. A device for applying the signal and measuring the output, i.e., a frequency response analyzer (FRA) is shown diagrammatically in Figure 1 by reference numeral 3. Such frequency response analyzers are commercially available devices and are used to acquire frequency dependent impedance data. Another fluid impedance monitor is shown schematically in Figure 2 where 1 and 2 represent concentric electrodes immersed in an oil 4. A digital function generator 5 generates a predetermined discrete sequence of signals and a digital-to-analog converter 6 converts the sequence to an analog sinusoidal voltage of

small amplitude, Vn, and frequency, ω, and applies the voltage to the outer electrode 2. The applied signal produces an electrical charge on the inner electrode 1. A charge amplifier 7 converts the charge into a sinusoidal voltage, Vout, at the same frequency, ω. The time-based waveforms of both input and output voltages are converted by an analog-to-digital converter 8 and the resulting data is acquired and processed by data processor 9.

[0023] In the data processor 9, a digital frequency response analyzer is used to obtain the complex transfer function of the output voltage with respect to the input voltage, i.e., the ratio of the complex amplitude of the sinusoidal output voltage to that of the sinusoidal input voltage. This complex transfer function is equal to the ratio of the feedback impedance of the charge amplifier 7 to the impedance of the working fluid to be analyzed. Dividing the transfer function by the known amplifier feedback impedance, the admittance of the working fluid is obtained. The reciprocal of the admittance is equal to the impedance of the working fluid. This process of data acquisition and processing is repeated over all operating frequencies until the desired impedance or admittance spectrum data is obtained.

[0024] According to the invention the frequency dependent impedance or admittance data obtained as described herein is used to determine one or more of the resistance, the capacitance, the frequency at which the phase angle between the voltage and current is 45° (Omega max), the time constant of the working fluid. This can be achieved, for example, by plotting the frequency dependent impedance data in the form of a Nyquist plot where, in rectangular coordinates, imaginary impedance ($Z'' = im(Z) = [Z] Sin(\Theta)$) is plotted against real impedance ($Z' = re(Z) = [Z]Cos(\Theta)$) or, in polar coordinates, $|Z| = [(Z')^2 + (Z'')^2]^{1/2}$ is plotted against Θ, the phase difference between voltage and current. Examples of Nyquist plots are shown in Figure 3 for a paper machine lubricant.

[0025] In Figure 3, the Y axis is the negative of the imaginary part of impedance, Z" and the x axis is the real part of impedance, Z'.

[0026] Preferably the Nyquist plot impedance data is further analyzed by fitting the data to a least-squares best fit curve. Such a curve can be fit using many standard data analysis packages. The resistance of the oil/electrode system can then be calculated by determining the diameter of the curve along the x axis. The frequency at which Θ reaches 45 degrees is known as Omega max. The reciprocal of Omega max is the time constant, RC. The capacitance may then be determined using relations, Omega max = 1/RC.

[0027] In one embodiment of the invention frequency dependent impedance data are measured for more than 4 values of Θ spanning a range of at least 45 degrees and a partial Nyquist curve is constructed from that data. This portion of the curve can then be analyzed with a standard least squares fitting program by assuming that the Nyquist plot follows an elliptical curve. The entire Nyquist curve can then be constructed by extrapolating to Θ values of zero and 180 degrees. At the same time values for capacitance, resistance and Omega max can also be determined.

[0028] At least one of the resistance, capacitance, Omega max, time constant and impedance values obtained for the working fluid is then compared to a predetermined value to determine the condition of the fluid being analyzed or monitored.

[0029] Preferably, the AC elecro-impedance measurements made on low conductivity industrial oils are made at a temperature above about 50°C and more preferably above about 65°C and up to about 150°C.

- 8 -

[0030]   In one embodiment the on-line, real time, impedance measurements taken and used to calculate at least one of the resistance, capacitance, Omega max, time constant and discrete impedance values of a working fluid and compared to a predetermined similar value or values as the case may be, is used to provide a visual display such as an indication of the remaining useful life of the fluid. Alternatively, a visual or other signal such as a bell or alarm may be provided when the fluid condition reaches a predetermined state requiring changing of the fluid before continuing operating the mechanical system. This is shown in Figure 2 as result display or signal module 10.

EXAMPLES

Example 1

[0031]   A used sample of a commercial paper machine oil was subjected to AC electroimpedence measurement at 70°C, 90°C and 120°C using a Solartron 1260 frequency response analyzer (FRA), an AC amplitude of 1 volt and a DC offset of 5 volts. Frequency was scanned from 10 Hz to 3.2 MHz. Figure 3 shows the Nyquist curves generated from the data.

Example 2

[0032]   Following the procedure of Example 1 a fresh sample of the same commercial paper machine oil of Example 1 was measured at room temperature (about 25°C) and at 120°C. Figure 4 shows that a Nyqist curve could not be generated when the measurement was made at room temperature.

Example 3

[0033]   Ten samples of a paper machine oil were obtained from operating paper machines and their impedance was measured at 130 frequencies at 120°C over a range of 10 hertz to 3.2 megahertz using a Solartron Model 1260A

impedance/gain phase analyzer and a Kavlico cylindrical impedance electrode pair with the oscillator and output circuitry disconnected. The resulting Nyquist curve was fit using Zplot/Zview software from Scribner Associates. The resistance was then calculated. In addition, the samples were analyzed by inductively coupled plasma (ICP) spectroscopy for phosphorous, zinc and calcium, important elements found in paper machine oil additive packages.

[0034] Depletion of these elements results in poor lubricant performance and is indicative of loss or degradation of the additives. The data are summarized in Table 1.

TABLE 1

Sample No.	Resistance	P (ppm)	Zn (ppm)	Ca (ppm)
1	11.48	482	752	110
2	8.0	477	717	143
3	13.55	515	744	270
4	11.98	482	733	263
5	9.39	519	804	154
6	11.70	521	819	178
7	14.29	514	802	186
8	10.11	524	836	193
9	35.55	444	614	101
10	28.48	256	192	24

[0035] The data demonstrate that resistance, as measured in accordance with the present invention, is indicative of additive level. Note especially the very high resistance and low additive levels of samples 9 and 10.

CLAIMS:

1.   A method for determining the condition of a working fluid contained in a mechanical system and at a temperature above about 50°C which comprises:

disposing a pair of spaced apart electrodes in the fluid;

imposing an AC signal over a range of 4 or more frequencies on the electrodes;

determining the impedance or admittance data as a function of the frequencies from electrical response to the imposed AC signals;

determining at least one of the following properties: resistance capacitance, Omega max, impedance and time constant; and

comparing the properties determined to a predetermined value of the said properties whereby an indication of the condition of the fluid is determined.

2.   The method of claim 1 wherein the frequencies range between 1 and 10,000 Hz.

3.   The method of claim 1 wherein the impedance data is measured at more than 4 frequencies and the data measured is used to constructed the Nyquist curve and the curve is extrapolated to the x-axis.

4.   The method of claims 1 to 3 including providing an electrical signal indicative of the fluid condition.

- 11 -

5. A method for obtaining an indication of the performance additive levels of a industrial oil containing less than about 3 wt% performance additives, on active ingredient basis, where the oil is contained in a mechanical system comprising:

measuring the impedance data of the oil at a plurality and over a range of frequencies while the oil is contained in the mechanical system and is at 50°C or higher;

obtaining a value for at least one of resistance capacitance, Omega max, impedance and time constant from the impedance data;

comparing the obtained value or values with a value or values for a known additive level whereby an indication of the additive level is obtained.

6. The method of claim 5 wherein at least one of the resistance, capacitance, Omega max, impedance and time constant is obtained by using the measured impedance data to construct a Nyquist curve and determining the resistance, capacitance impedance Omega max, or time constant from the curve.

7. The method of claim 6 wherein the impedance data is measured by imposing an AC signal over a range of frequencies and the response to those signals is detected.

8. The method of claim 7 wherein the impedance data is measure at 4 or more frequencies in the range of between 1 and 10,000 Hz.

9. The method of claim 8 including means for generating an electrical signal when the calculated value exceeds a predetermined value.
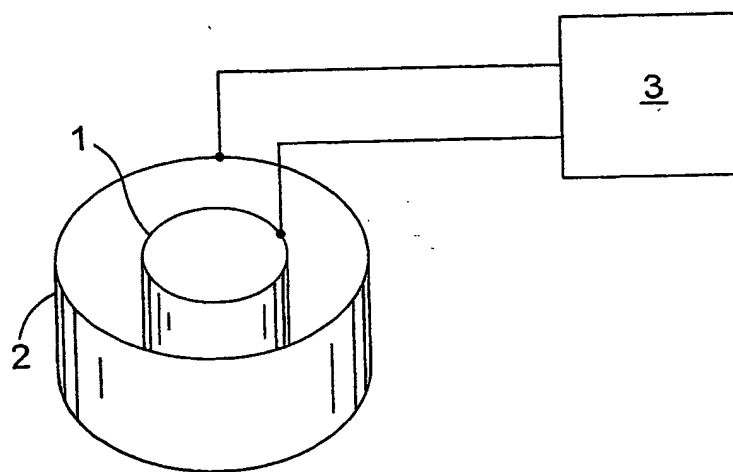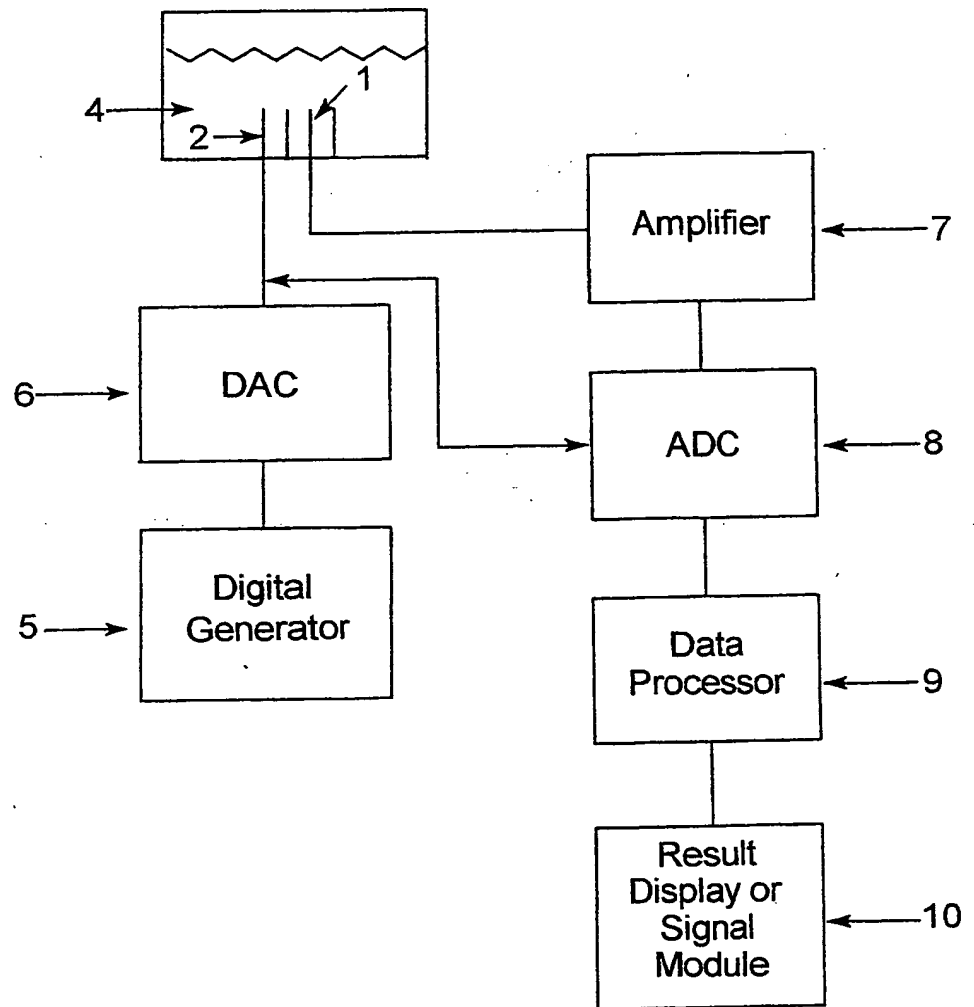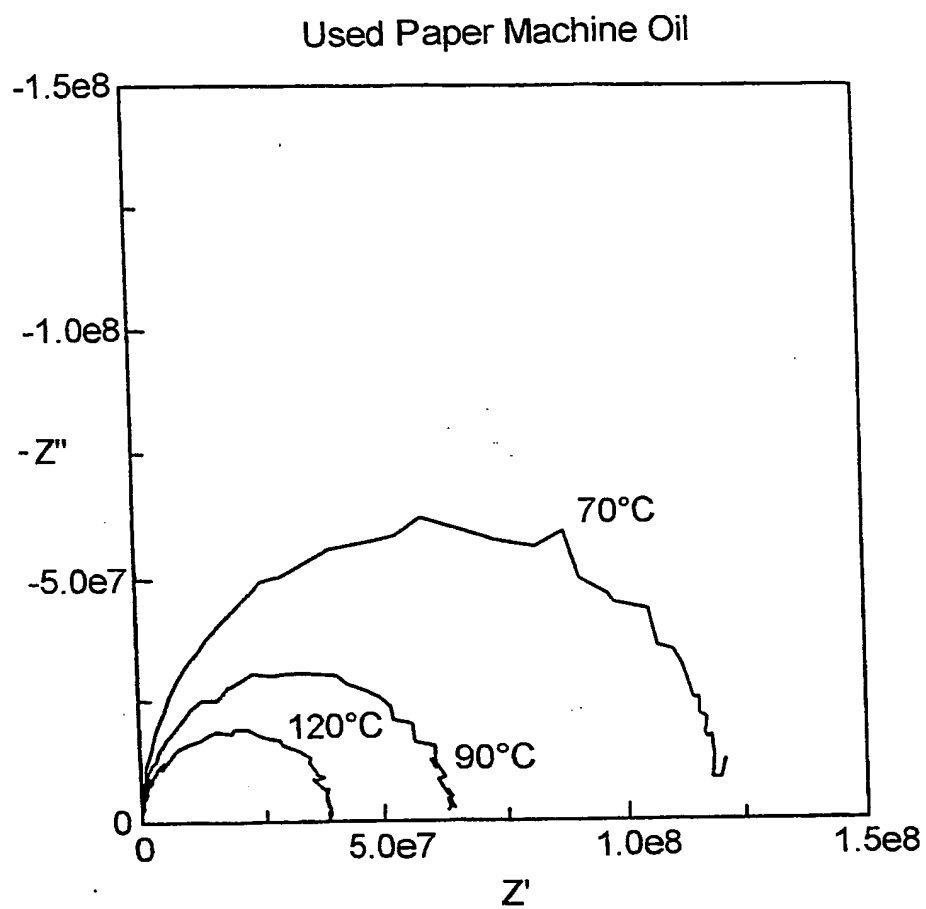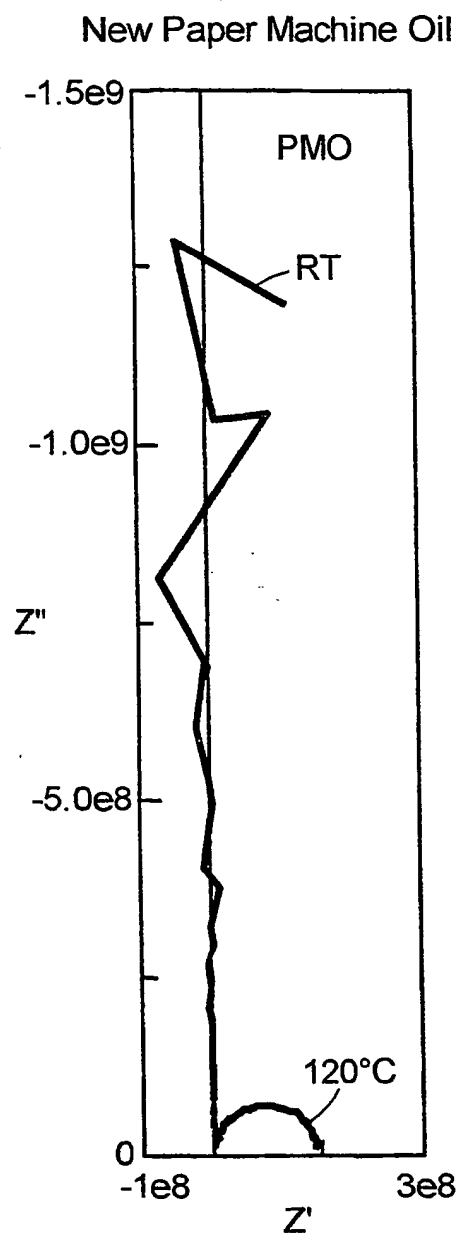
FIG. 1

FIG. 2

Used Paper Machine Oil

FIG. 3

FIG. 4

INTERNATIONAL SEARCH REPORT

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7   G01N33/28   G01N27/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7   G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 014 082 A (EATON CORP) 28 June 2000 (2000-06-28)	1,2,4,5, 7-9
Y	page 6, line 31 - line 34 page 7, line 12 - line 15; figure 13	3,6
Y	US 5 425 867 A (CARR RICHARD NORMAN ET AL) 20 June 1995 (1995-06-20) column 4, line 43 - line 57; figures 6,7	3,6
X	EP 1 111 383 A (SC2N SA) 27 June 2001 (2001-06-27) the whole document	1
P,X	FR 2 820 824 A (TOTAL RAFFINAGE DISTRIBUTION) 16 August 2002 (2002-08-16) the whole document	1-9

-/-

[X]	Further documents are listed in the continuation of box C.	[X]	Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
22 September 2003	30/09/2003

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Joyce, D

Form PCT/ISA/210 (second sheet) (July 1992)

BEST AVAILABLE COPY

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category°	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 489 849 A (SADOWAY DONALD R ET AL) 6 February 1996 (1996-02-06) the whole document	1-9
A	POPKIROV G S ET AL: "OPTIMIZATION OF THE PERTUBATION SIGNAL FOR ELECTROCHEMICAL IMPEDANCE SPECTROSCOPY IN THE TIME DOMAIN" REVIEW OF SCIENTIFIC INSTRUMENTS, AMERICAN INSTITUTE OF PHYSICS. NEW YORK, US, vol. 64, no. 11, November 1993 (1993-11), pages 3111-3115, XP000955440 ISSN: 0034-6748 the whole document	1,5
A	WANG S S ET AL: "The application of a.c. impedance technique for detecting glycol contamination in engine oil" SENSORS AND ACTUATORS B, ELSEVIER SEQUOIA S.A., LAUSANNE, CH, vol. 40, no. 2-3, 15 May 1997 (1997-05-15), pages 193-197, XP004088719 ISSN: 0925-4005 the whole document	1,5

BEST AVAILABLE COPY

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP 1014082	A	28-06-2000	US	6278281 B1	21-08-2001
			BR	9907347 A	29-08-2000
			CN	1258002 A	28-06-2000
			EP	1014082 A2	28-06-2000
			JP	2000193619 A	14-07-2000
			KR	2000048376 A	25-07-2000
US 5425867	A	20-06-1995	AU	1564992 A	21-10-1992
			WO	9216825 A1	01-10-1992
			GB	2269458 A ,B	09-02-1994
EP 1111383	A	27-06-2001	FR	2803038 A1	29-06-2001
			EP	1111383 A1	27-06-2001
FR 2820824	A	16-08-2002	FR	2820824 A1	16-08-2002
			WO	02065086 A2	22-08-2002
US 5489849	A	06-02-1996	NONE		

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP 1014082	A	28-06-2000	US	6278281 B1	21-08-2001
			BR	9907347 A	29-08-2000
			CN	1258002 A	28-06-2000
			EP	1014082 A2	28-06-2000
			JP	2000193619 A	14-07-2000
			KR	2000048376 A	25-07-2000
US 5425867	A	20-06-1995	AU	1564992 A	21-10-1992
			WO	9216825 A1	01-10-1992
			GB	2269458 A ,B	09-02-1994
EP 1111383	A	27-06-2001	FR	2803038 A1	29-06-2001
			EP	1111383 A1	27-06-2001
FR 2820824	A	16-08-2002	FR	2820824 A1	16-08-2002
			WO	02065086 A2	22-08-2002
US 5489849	A	06-02-1996	NONE		

Form PCT/ISA/210 (patent family annex) (July 1992)